BABY PANEL®

ELECTRIC RADIANT PANEL

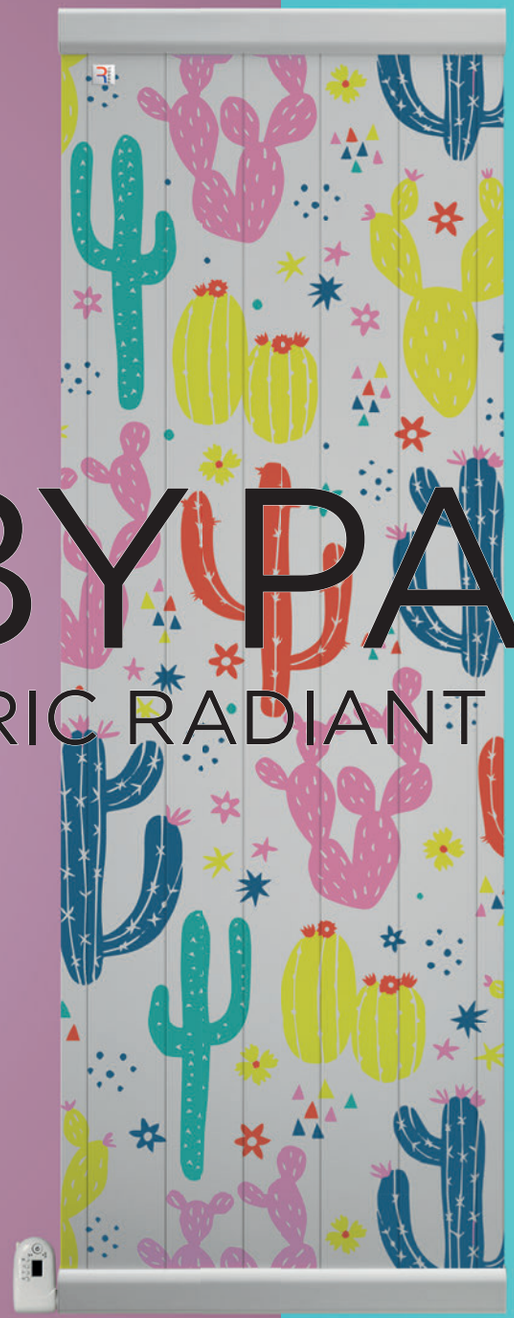

Low Power
Consumption

THE WELL-BEING
OF YOUR CHILDREN

PANEL

BEST ENERGY EFFICIENCY

FREEDOM OF PERSONALIZATION

BABY PANEL® RADIANT PANEL

Low Power Consumption

The first electric radiant panel
that cares about your child's health
and embellishes his/her room.

The highest comfort for your children

The radiant efficiency of Baby Panel®
ensures an unrivaled healthiness,
without air treatment and in absolute silence.
The quality of the materials and the customized
images make this product unique,
perfect for children's rooms.
Baby Panel® is ready to use.
Install it quickly and give the right warmth
for your child's games and sleep.

Many advantages

Best comfort

No air treatment and no noise

High security

No edges, no burns

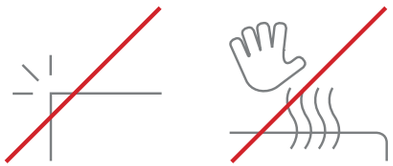

Very low consumption

Power ratings from 100 W

Space saving

Thickness of only 4 cm

No boiler

Immediate installation:

you just need an electrical socket

Freedom of customization

Choose your image, photo, drawing...

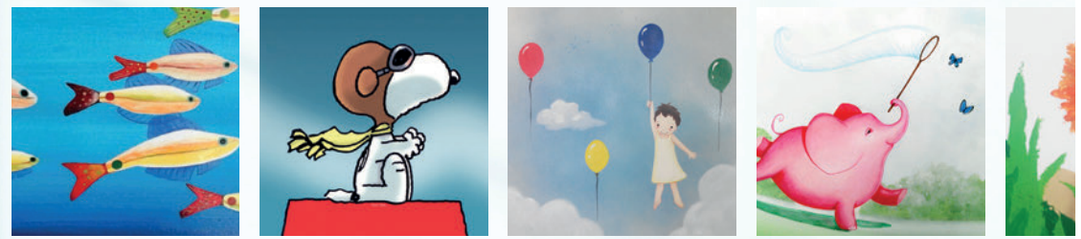

Choose your image

A work of art, the photo of your favorite moments
in harmony with your style of furniture.
We take care of the entire design phase,
checking resolution and image quality.

Customize as you wish!



The images are indicative only. Colors may vary from the illustrations.

BABY PANEL® RADIANT PANEL

Low Power Consumption

Baby Panel® consumes much less energy than traditional electric radiators.

A solution that makes happy children and parents.

DIGITAL THERMOSTAT

The digital thermostat is able to maintain the desired room temperature thanks to an external sensor with 4 functions: Comfort, Night, Frost, Fil-Pilote.

ELECTRICAL SPECIFICATIONS
Power supply: 230VAC 50HZ
Maximum power: 1000W - 230VAC
Minimum power: 100W - 230VAC

PERFORMANCES
Range of ambient temperatures:
7 ° C to 32 ° C (44°F to 89°F)

SAFETY
IP Rating: IP44
Insulation class: I, II
Approval mark: CE
Dimensions: 113mm x 73mm x 39mm

Model		A	B	C (C max)	watt
vertical	horizontal	mm	mm	mm	
BY2-800	—	815	330	33,3 (44,8)	100
BY3-800	—	815	450	33,3 (44,8)	100
BY4-800	—	815	570	33,3 (44,8)	200
BY5-800	—	815	690	33,3 (44,8)	200
BY6-800	BYO6-800	815	810	33,3 (44,8)	250
BY7-800	BYO7-800	815	930	33,3 (44,8)	250
BY8-800	BYO8-800	815	1050	33,3 (44,8)	300
BY9-800	BYO9-800	815	1170	33,3 (44,8)	300
BY2-1600	—	1615	330	33,3 (44,8)	200
BY3-1600	—	1615	450	33,3 (44,8)	250
BY4-1600	—	1615	570	33,3 (44,8)	300
BY5-1600	—	1615	690	33,3 (44,8)	400
BY6-1600	BYO6-1600	1615	810	33,3 (44,8)	400
BY7-1600	BYO7-1600	1615	930	33,3 (44,8)	500
BY8-1600	BYO8-1600	1615	1050	33,3 (44,8)	500
BY9-1600	BYO9-1600	1615	1170	33,3 (44,8)	600
BY2-2000	—	2015	330	33,3 (44,8)	250
BY3-2000	—	2015	450	33,3 (44,8)	250
BY4-2000	—	2015	570	33,3 (44,8)	300
BY5-2000	—	2015	690	33,3 (44,8)	400
BY6-2000	BYO6-2000	2015	810	33,3 (44,8)	500
BY7-2000	BYO7-2000	2015	930	33,3 (44,8)	600
BY8-2000	BYO8-2000	2015	1050	33,3 (44,8)	700
BY9-2000	BYO9-2000	2015	1170	33,3 (44,8)	700
BY2-2500	—	2515	330	33,3 (44,8)	250
BY3-2500	—	2515	450	33,3 (44,8)	300
BY4-2500	—	2515	570	33,3 (44,8)	400
BY5-2500	—	2515	690	33,3 (44,8)	400
BY6-2500	—	2515	810	33,3 (44,8)	600
BY7-2500	—	2515	930	33,3 (44,8)	700
BY8-2500	—	2515	1050	33,3 (44,8)	700
BY9-2500	—	2515	1170	33,3 (44,8)	1000

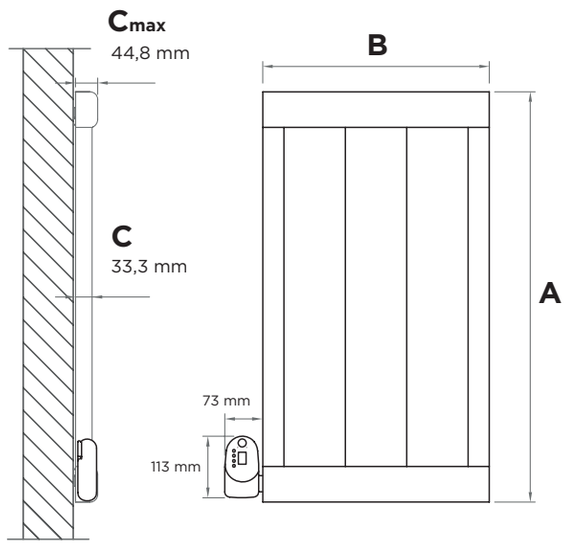

Vertical from BY2 to BY9

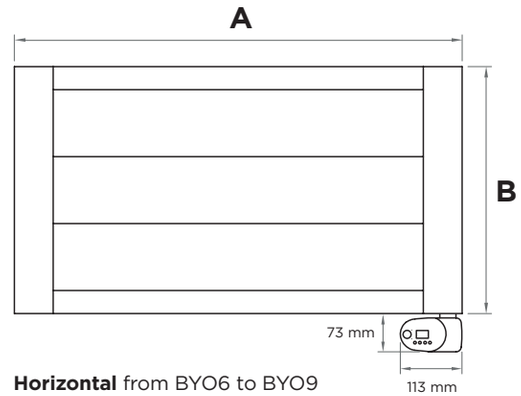

Horizontal from BYO6 to BYO9

SIZING TABLE*

Room surface (m^2)	Suitable models	
	Vertical	Horizontal
4-6	BY5-800 / BY3-1600 BY2-2000	–
6-8	BY7-800 / BY4-1600 BY3-2000 / BY2-2500	BYO7-800
8-10	BY9-800 / BY5-1600 BY4-2000 / BY3-2500	BYO9-800
11-13	BY6-1600 / BY5-2000 BY4-2500	BYO6-1600
14-17	BY8-1600 / BY6-2000 BY5-2500	BYO8-1600 BYO6-2000
18-24	BY8-2000 / BY6-2500	BYO8-2000

*Preliminary design referred to a room height of 2.7 m. For a detailed sizing or a check, please send an mail to info@rpanel.com

BABY PANEL®

ELECTRIC RADIANT PANEL

Low Power
Consumption

Notes

Project and editorial coordination: >FEEDBACK www.feedback.it
Photos of panels: Dario D'India stills&motion

PANEL

R Panel®

www.rpanel.com - info@rpanel.com

Tel +39 091 890 2404 - Cell +39 3756251311

Copyright © R Panel 2017